

GASKETS in PTFE heavy duty: Compatible for a wide range of fluids, temperatures and pressures

Pump and motor construction data
with limits of use and operating conditions

Compatible for a wide range of fluids, temperatures and pressures


High temperatures resistant (+260 °C)

High mechanical strength

Suitable for flanged joints, three-piece fittings, flexible hoses,



Types	Dimensions in mm		
	D. int.	D. ext.	thick
1/2"	11,5	18,5	2
3/4"	16	24	2
1"	21	30	2
1"1/4	27,3	38	2
1"1/2	32,5	44	2
2"	42	56	2

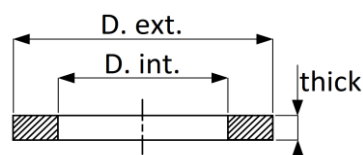

Other dimensions on request

Cerifications
FDA, WRAS certified product